



Rapid 45-2 device installation trunking



Just right for you!

One system, many options: The new Rapid 45-2 device installation trunking for the installation of devices of the OBO Modul 45 and Modul 45connect series.



A clear profile. Rapid 45-2 plastic

Aesthetic and functional. The Rapid 45-2 plastic device installation trunking is a classic office item. With its new design, it shows a clear character and a high level of functionality.

Attractive design. Rapid 45-2 aluminium

Surface quality plus a balanced shape - now that's stylish. Technical precision supplements the attractive appearance of the aluminium device installation trunking.




A clear shape meets technical efficiency.

The new Rapid 45 generation unites a symmetrical design, homogenous colour quality and technical flexibility in a single system. Innovative fittings allow practical wall installation in administration buildings, commercial areas and in industry. In three dimensions, the Rapid 45-2 device installation trunking offers a wide range of applications.



Aluminium

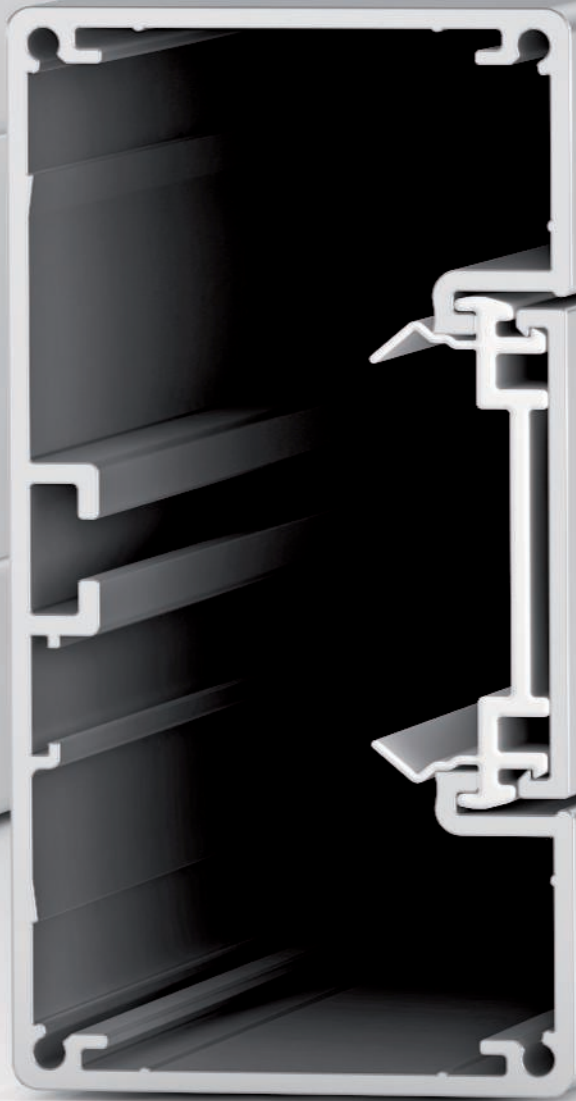


Device installation






Switches, sockets and data technology elements of the OBO Modul 45 and Modul 45connect series can simply be clicked into the trunking profile. A compact system, which can be mounted quickly and expanded easily.



Discover the variety of our Rapid 45-2 device installation trunking.

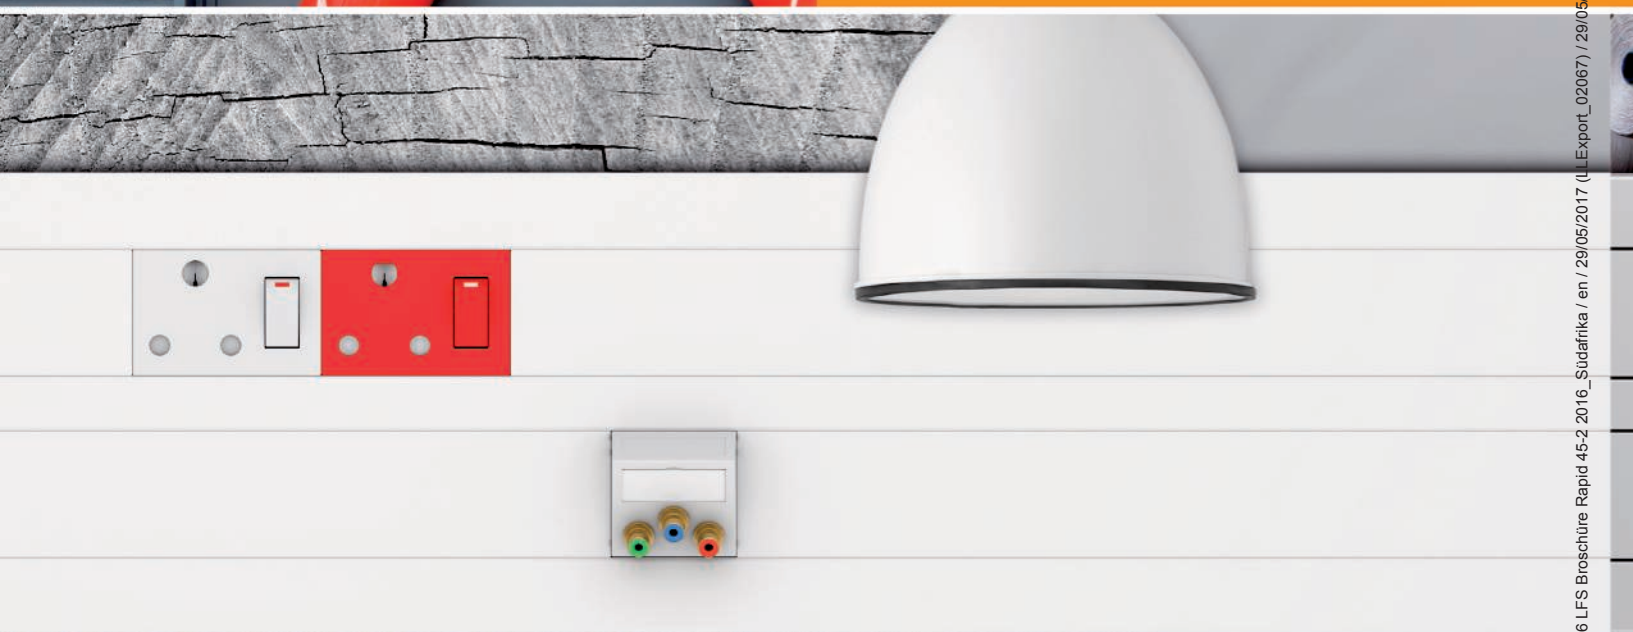

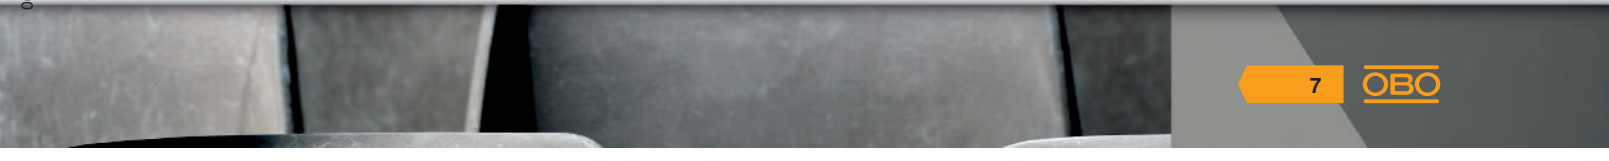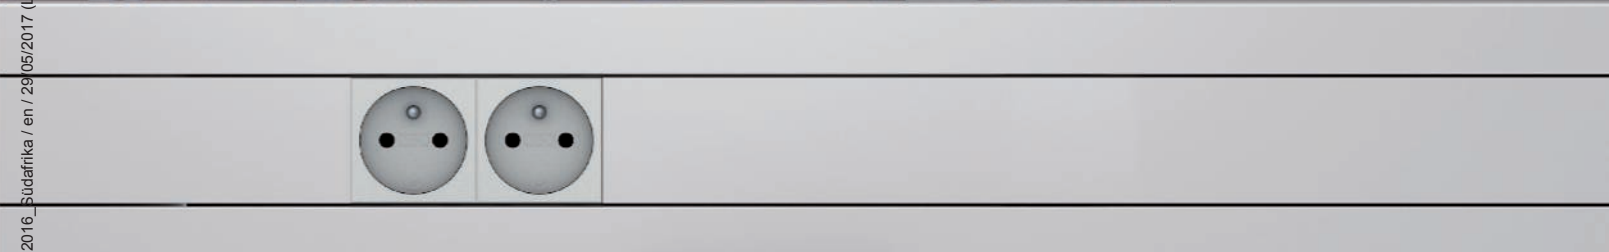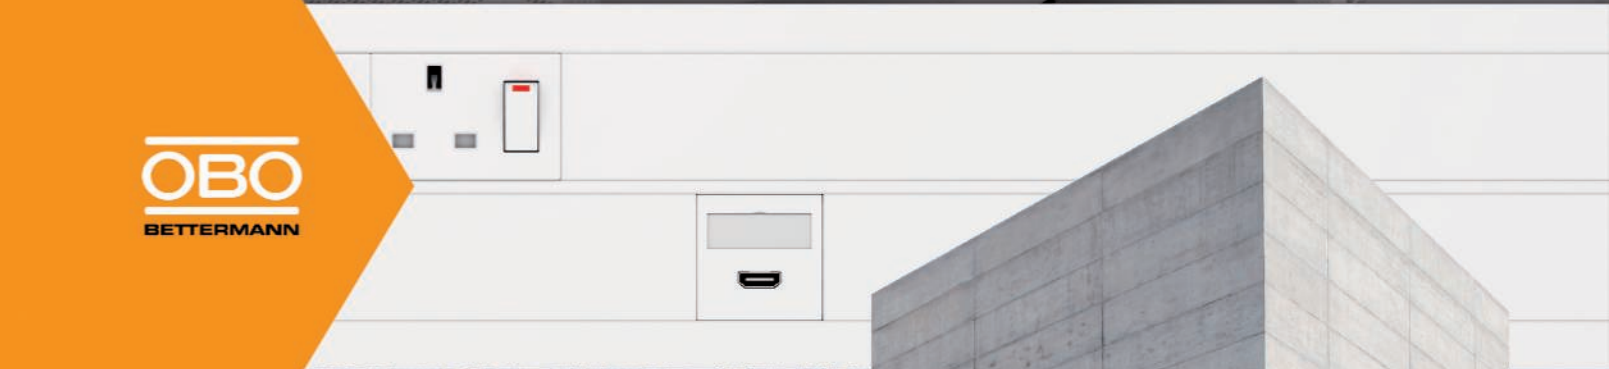

OBO
BETTERMANN

06 LFS Broschüre Rapid 45-2 2016 - Sudafrika / en / 29/05/2017 (LFS-3) / 02/05/2017 (LFS-3) / 29/05/2017

Install more intelligently.

The principle of Modul 45

The perfect supplement to Rapid 45-2: Devices of the OBO Modul 45 series made by us. Switches, sockets and data technology and multimedia elements are simply snapped into the system environment by hand – and the practical installation is already complete.

Compared with standard installation types, the cost of installation, expansion and replacement of devices is considerably lower. No additional components, such as accessory mounting boxes, adapters or cover frames, are required.



One system, many options.

With its standardised installation dimension and a wide range of components, Modul 45 can offer the right solution for any system environment. The device range fulfils countless international requirements and national standards.

Mounting with a single click.



Click

The principle of Modul 45connect

Modul 45connect stands out through its innovative socket and adapter components and offers numerous application options. The connection adapter, with which sockets can be arranged easily, creates a high level of flexibility. Thus, it is possible to create multi-socket combinations without the need for additional wiring. Combinations with a maximum of two connection adapters are tested and VDE-approved. 4x to 9x socket combinations can be created easily.



A clear profile. Rapid 45-2 plastic.

The classic device installation trunking for the office. Discover the versatility of Rapid 45-2.



Range of variants

In the plastic variant, Rapid 45-2 is able to shine in both its light grey and pure white versions. Four trunking widths are available.

- RAL 9010 pure white
- RAL 7035 light grey

Available dimensions (trunking height x trunking width)

- 53 x 100 mm, one-compartment
- 53 x 130 mm, two-compartment
- 53 x 165 mm, two-compartment
- 53 x 160 mm, three-compartment

Quick mounting

Intelligent mounting details, such as joint connectors and covers, allow rapid installation.




Fittings



A compact selection of fittings, such as internal and external corners, flat angles and T pieces, ensure tidy mounting. The hood fittings fit both the plastic system and the aluminium system.

Innovation in detail

Rapid 45-2 combines straightforward design and the highest quality with perfect handling in termination and processing. Accessory parts, such as end pieces or variable fittings, fit both the plastic and also the aluminium trunking.

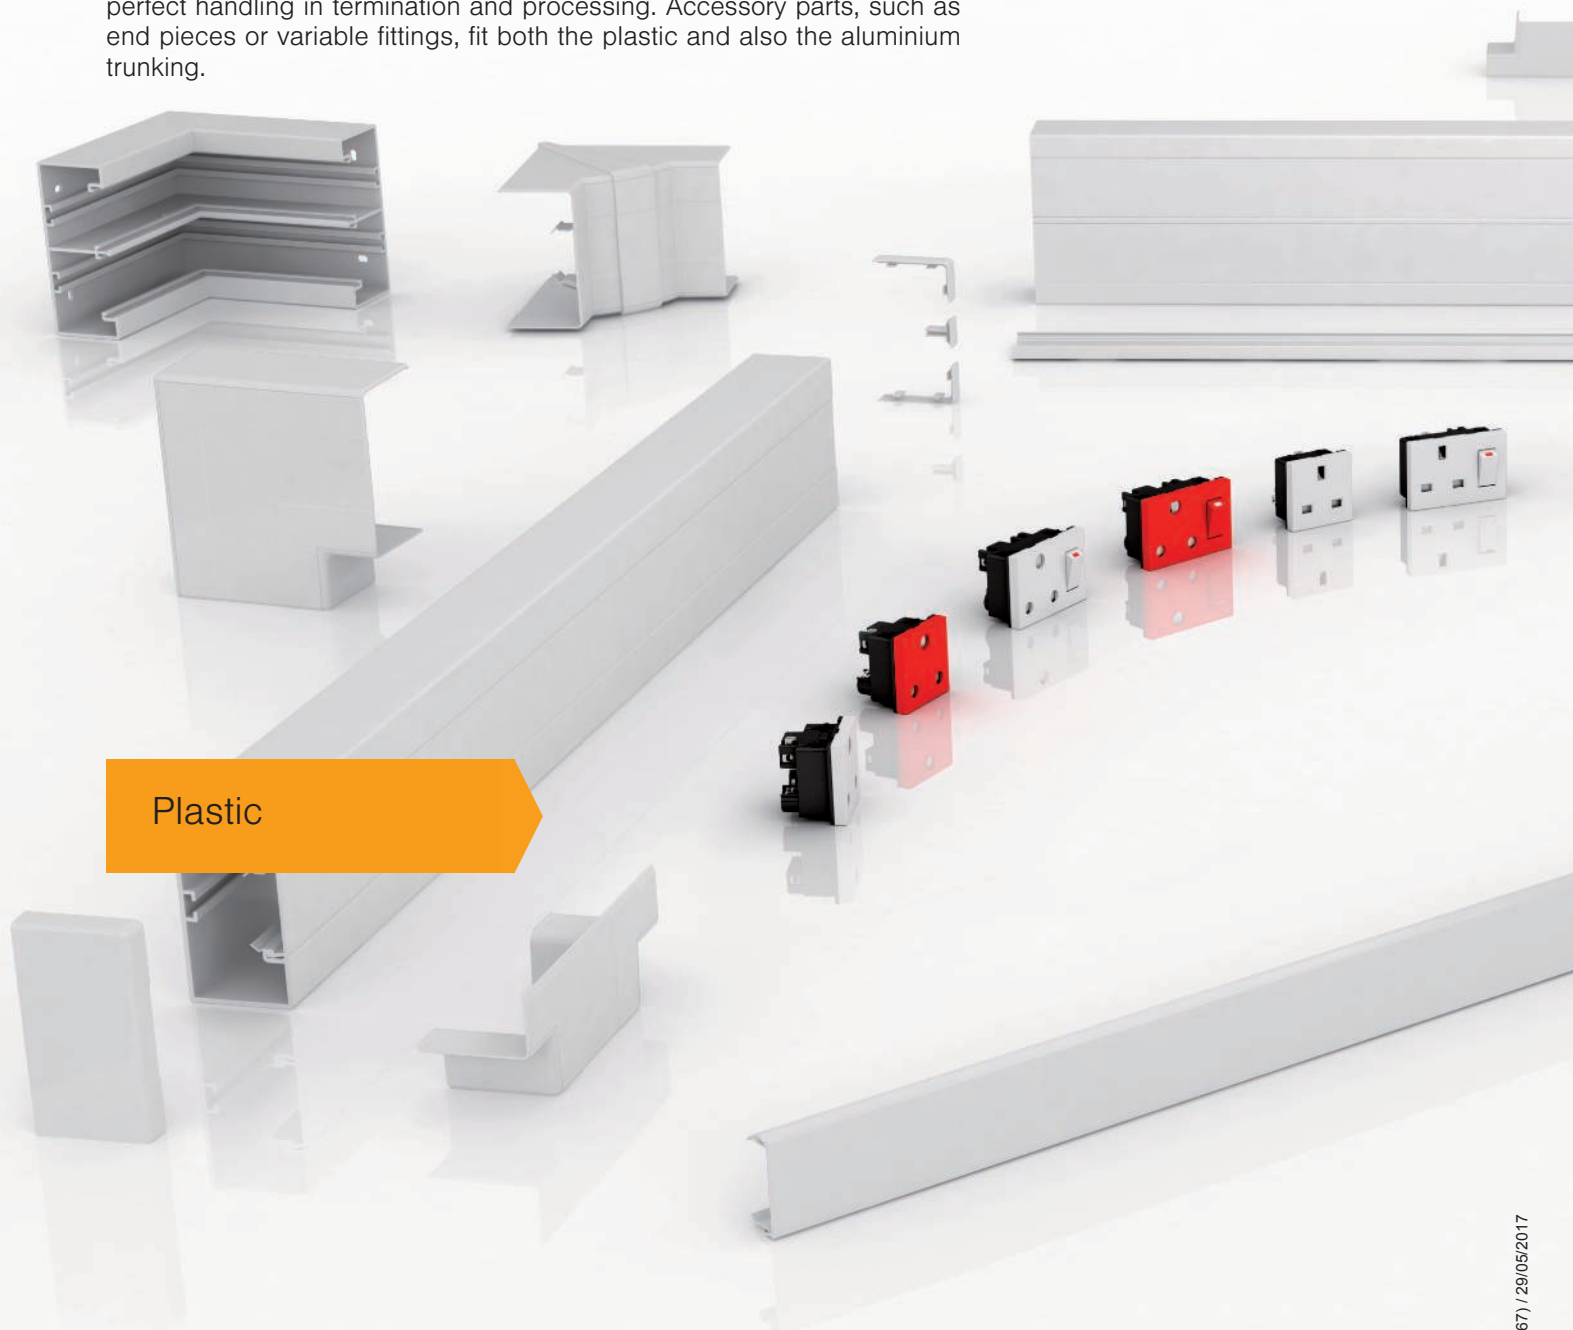

Plastic

1. Symmetrical product design


Rapid, simple installation, reliable function and contemporary design. These are the hallmarks of the new Rapid 45-2 generation.

2. Additional dimensions

The Rapid 45-2 device installation system also shows its versatility in its dimensions. The additional width of 130 mm supplements the existing 100 mm and 165 mm dimensions.

3. Innovative fittings

Innovative fittings extend the Rapid 45-2 system. The new T piece top hoods can be installed quickly. They are suitable for supply with the WDK trunking 40060 or the Rapid 45-2 device installation trunking.

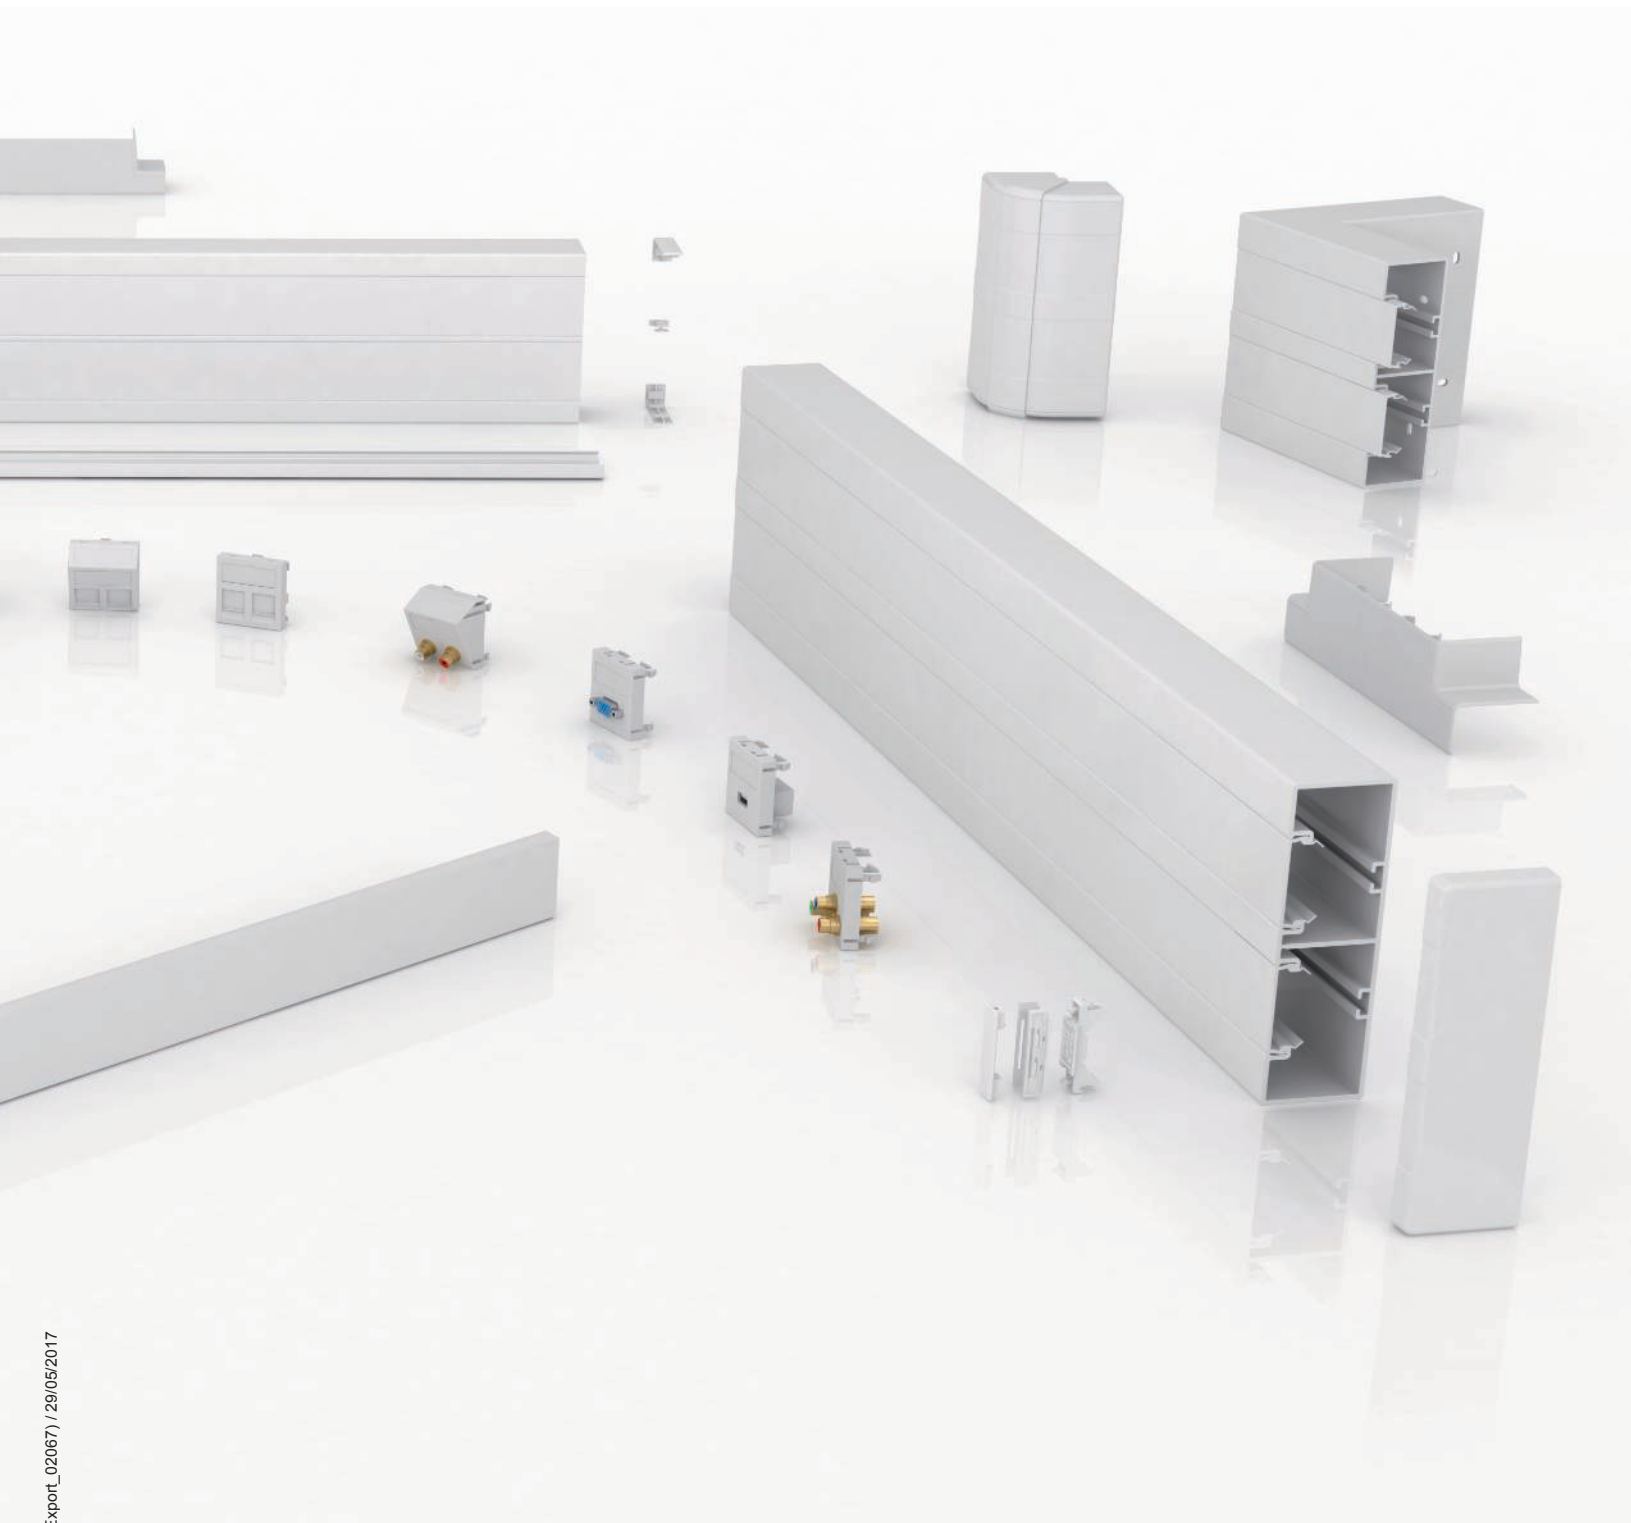

4. Toolless mounting

Ideal partners for the Rapid 45-2: Devices of the OBO Modul 45-2 and Modul 45connect series. The front-locking devices are simply clicked into the 45 mm system opening. There is no need to strip cables or mount cable connections and strain reliefs.

5. One system

Rapid 45-2 plastic and Rapid 45-2 aluminium have the same dimensions. The consistent standardisation simplifies the combination of individual system parts.

6. Variety

Switches, sockets, data technology and multimedia elements: Devices of the Modul 45 and Modul 45connect series allow the creation of functional yet aesthetic solutions for every system environment.



Overview, Rapid 45-2 GK device installation trunking, plastic



	1	2	3	4	5	6	7	8	9	10	11	12	13
	Device installation trunking	Trunking connector and joint cover	Joint cover	External corner	External corner cover	Flat angle	Flat angle cover	Internal corner	Internal corner cover	T piece adapter	T piece adapter on WDK	End piece	Partition
GK53100		6113 02 0	6113 03 0	6113 04 0	6113 05 0	6113 08 0	6113 09 0	6113 06 0	6113 07 0	6113 10 0	6113 31 0	6113 11 0	6113 29 0
Trunking height 53 mm, trunking width 100 mm													
GK53130		6113 02 2	6113 03 2	6113 04 2	6113 05 2	6113 08 2	6113 09 2	6113 06 2	6113 07 2	6113 10 2	6113 31 2	6113 11 2	6113 29 0
Trunking height 53 mm, trunking width 130 mm													
GK53165		6113 02 0	6113 03 0	6113 41 0	6113 42 0	6113 45 0	6113 46 0	6113 43 0	6113 44 0	6113 48 0	6113 31 0	6113 47 0	6113 29 0
Trunking height 53 mm, trunking width 165 mm													
		6113 02 2	6113 03 2	6113 41 2	6113 42 2	6113 45 2	6113 46 2	6113 43 2	6113 44 2	6113 48 2	6113 31 2	6113 47 2	6113 29 0

Colours: Pure white Light grey You can find our comprehensive overall system in our cable routing systems catalogue.

SOUTH AFRICA

O-line (Pty) Ltd - Head Office

Reg. No. 1982/000082/07
14/16 Prop Street
Selby Ex t. 11
Johannesburg 2001
P.O Box 6457
Johannesburg 2000
South Africa
Tel: (+27) 011-378-3700
Fax: (+27) 011-493-0048
email: o-line@o-line.com

O-line Kwazulu-Natal

Unit 1, Chelsea Road
Industrial Park
17 Chelsea Road
New Germany 3610
P.O. Box 2534
New Germany 3620
South Africa
Tel: (+27) 031-705-6355
Fax: (+27) 031-705-6358
email: o-linekzn@o-line.com

O-line Port Elizabeth

26 Paterson Road
North End
Port Elizabeth 6001
P.O. Box 1352
Port Elizabeth 6000
South Africa
Tel: (+27) 041-486-3674
Fax: (+27) 041-484-5463
email: o-linepe@o-line.com

O-line Pretoria

The Willows Business Park
219 Battery Street
Silverton
Pretoria
P.O. Box 2039 Silverton
0127
South Africa
Tel: (+27) 012-803-1803
Fax: (+27) 012-803-1733
email: o-linepta@o-line.com

O-line Bloemfontein

21 Sand du Plessis Avenue
Estoire
Bloemfontein 9301
P.O.Box 29809
Danhof 9310
Tel:(+27) 051-432-0707
Fax: (+27) 051-432-0708
email: o-linebfn@o-line.com

O-line Cape Town

Unit 2, 6 Thor Circle
Viking Place
Thornton 7460
P.O. Box 506
Eppindust 7475
South Africa
Tel: (+27) 021-531-9071
Fax:(+27) 021-531-8092
email: o-linecpt@o-line.com

INTERNATIONAL

O-line Mocambique Limitada

Reg. No. 2009/1001240/68
Rua Beleluane
Parcela 510
Djuba, Matola-Rio
Maputo
Tel: (00) 258-217 30243
Fax: (00) 258-217 30244
e-mail: o-linemz@o-line.com

OBO Ghana

Reg. No CS036372016
Plot No.53, Flower Pot,
Spintex Road Accra Ghana
Tel: (00) 233-5015 22488
Fax: (00) 233-2441 94426
e-mail: obo.ghana@
obo-bettermann.com

www.o-line.com



O-line